


# ASSEMBLY INSTRUCTIONS

## FOR

### TEDDY BED - 2' 6" & 3' 0"

#### Stage 1

Place barrel nut into hole at the ends of the side rail. Ensure that narrow cross lath support rail is at the bottom side. Pass long bolt through leg post and offer side rail to leg post. Push bolts through & tighten bolt to nut (finger tight only at this stage).

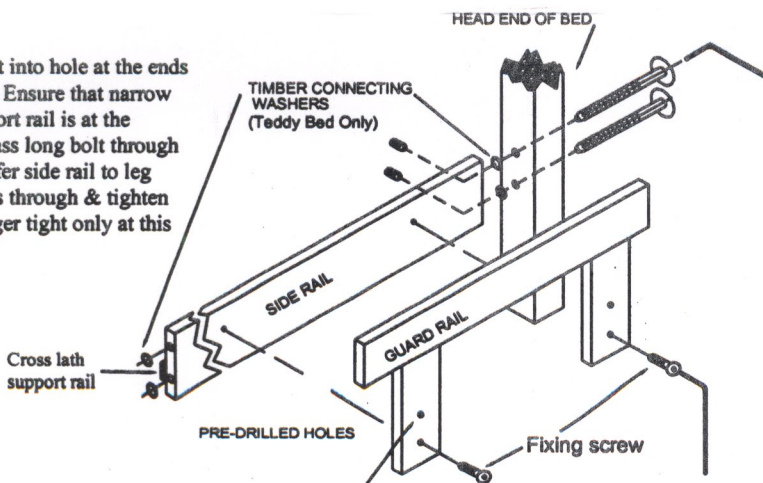

#### Teddy Bed - Guard Rail fixing instructions

Guard Rail can be fastened to either side of the bed

1 Ensure that the timber connecting washers are placed on the bolts between the leg and the side rail - (see drawing). This ensures a secure fixing for the guard rail

2 Once bed is assembled the guard rail can be fixed by using the 2 fixing screws and tightened with the allen key

#### IMPORTANT:


AS AN EXTRA SAFETY MEASURE FOR A YOUNGER CHILD - USE UPPER HOLES IN THE GUARD RAIL, AS ILLUSTRATED

First cross support lath to be set level with end of support rail

#### Stage 2

Place cross support laths in position using the template to evenly space, then fasten down using wood screws provided.

We recommend that you fasten down one side and then repeat on opposite side after tightening the end bolts (as in stage 1). Ensure that all corners are at 90° before the final tightening of the end bolts.

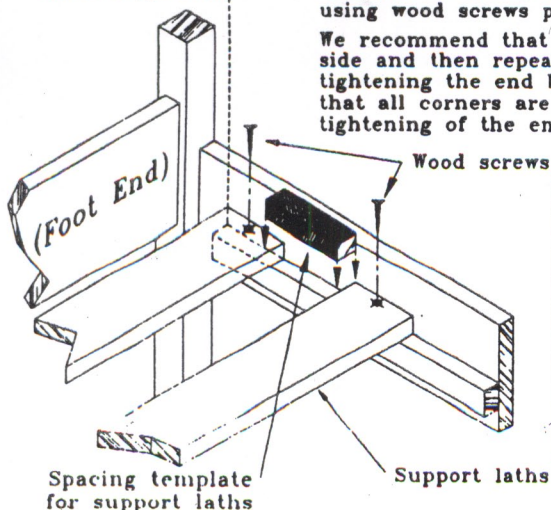

#### FIXING KIT

##### Teddy Bed

- 8 - Brass bolts
- 8 - Barrel Nuts
- Wood screws
- 1 - Spacing Template
- 1 - Allen key
- 2 - Brass fixing screw
- 8 - Timber connecting washers